Danish Refugee Council

Marneuli

Architectural Project

Individual house (8X8m)



2019

Content

Name of the Page	№	
Title	1	
Content	2	
Explanation letter	3	
Textures of the Facades	4	
House Plan	5	
Section 1-1	6	
Section 2-2	7	
Facades	8	
Basement plan	9	
Floor types	10	
Windows and doors	11	
Roof plan	12	
Organization of the construction works and schedule	13	

Danish Refugee Council

Individual House
(8X8m)

-

Project address:
Georgia,
Marneuli

-

Stage:
Architectural project

Content

Format A - 3

Page	Pages
2	13

Explanation Letter

The residential house represented in the project is a one-storey solid building with a floor raised on 1.2 meters above the ground level. The house has the following areas:

- Common room
- Kitchen
- Bedrooms
- Bathroom
- Corridor
- Balconies

The height of the floor from the floor to the ceiling is 2.8 meters. The walls are made of reinforced three-layer masonry (sandwich structure) namely the external layer of ceramic perforated bricks, the middle layer of thermal insulation of XPX slabs and the small wall pumice blocks inside. The bearing structure of the additional building is the framed structure of reinforced concrete slabs consisting of walls with reinforced inserts (cores, belts) monolith reinforced concrete slab and a reinforced concrete belt binding at the ceiling level, in the construction of which the reinforced bearing walls are included. The reinforced cores are concreted in parallel to the construction of reinforced bearing walls.
The partitions are made from the reinforced small wall pumice blocks.
The floors in the sanitary facilities will be tiled and in the rooms, they will be made of laminated parquet. The insulation of the floor will be completed with XPS slabs, while the ceiling will be insulated with fiberglass. On the ceiling at the level of the attic, there will be installed a rough-timber boarding. The hung ceiling of the bathroom will be made with plastic boards, and in the rooms with gypsum boards.
The bearing structure of the roof is wooden, and the roofing is made of painted metal tiles.
The windows are made from PVC profiles with double glazing. The entrance doors are stainless steel, bathroom doors are PVC, and the doors in the living rooms are wooden (MDF). External stairs will be made of mosaic stainless steel I-beams.
The concrete walkways will be installed around the building. The internal networks of power supply, sewerage, and water supply will be provided to the building, which will be connected to external bulk power system networks.

DANISH REFUGEE COUNCIL

Danish Refugee Council

(8X8m)

Project address:

Georgia,
Marneuli

-

Stage:
Architectural project

Explanation Letter

Format A - 3

Page	Pages
3	13

Textures on the Facade



DANISH REFUGEE COUNCIL

Danish Refugee Council

Individual Residential House

(8X8m)

Project address:

Georgia,
Marneuli


-

Stage:
Architectural project

Textures on the facade

Format	A - 3
Page	Pages
4	13

House Plan

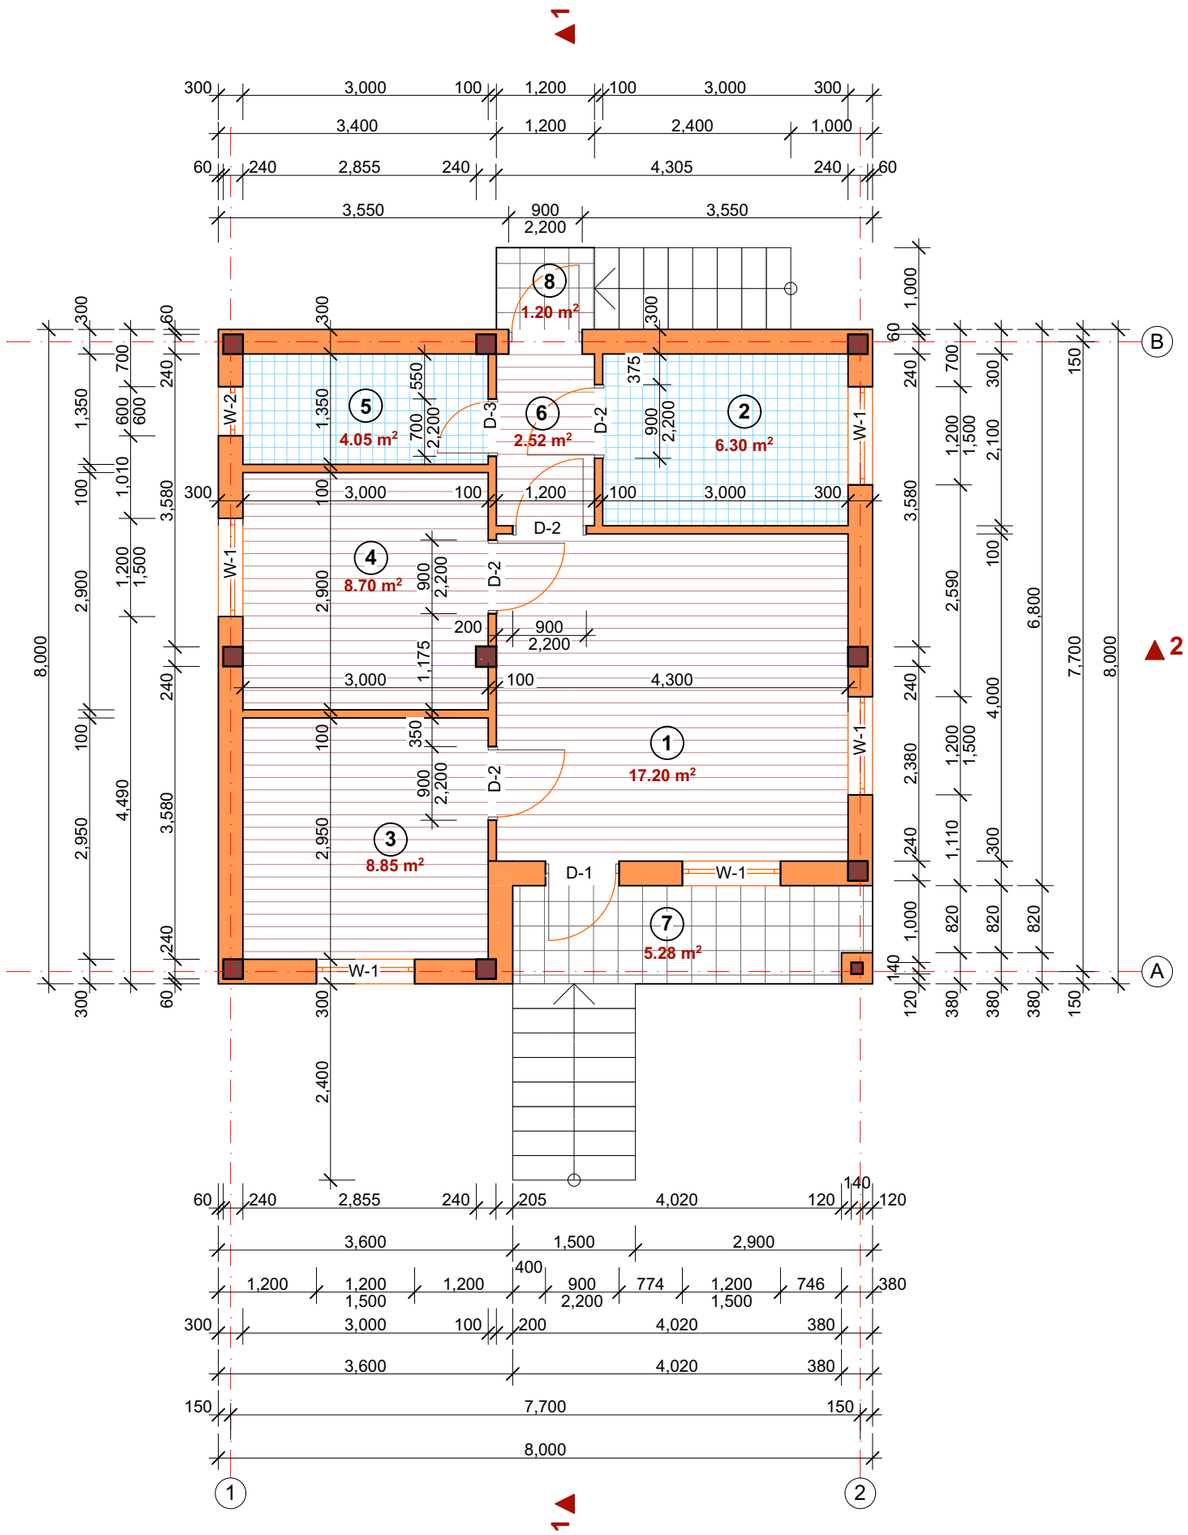

Legend:

1. Common room
2. Kitchen
3. Bedroom
4. Bedroom
5. WC
6. Corridor
7. Balcony
8. Balcony

Total area - 54.1 m2

Summer area - 6.48 m2

DANISH REFUGEE COUNCIL

Danish Refugee Council

Individual Residential House

(8X8m)

Project address:


Georgia,
Marneuli

Stage:
Architectural project

House plan

Format	A - 3
Page	Pages
5	13

Section 1-1

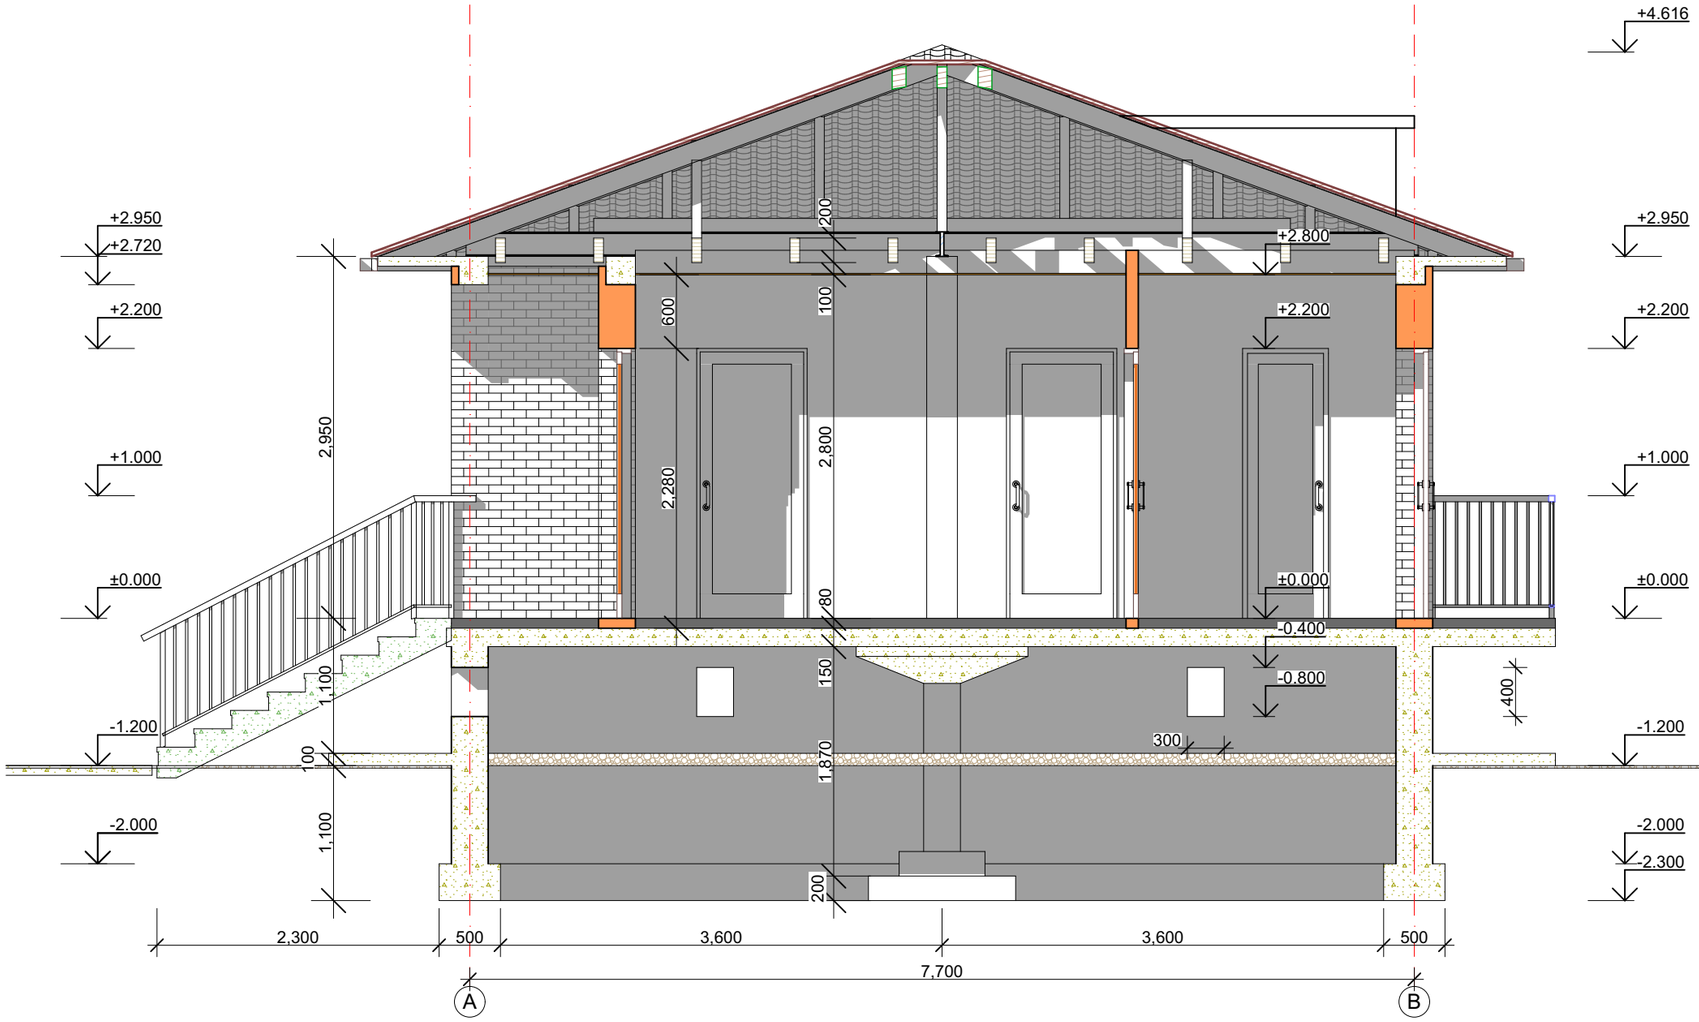

DANISH REFUGEE COUNCIL

Danish Refugee Council

Individual house
(8X8m)

Project address:

Georgia,
Marneuli


-

Stage:
Architectural project

Section 1-1

Format	A - 3
Page	Pages
6	13

Section 2-2

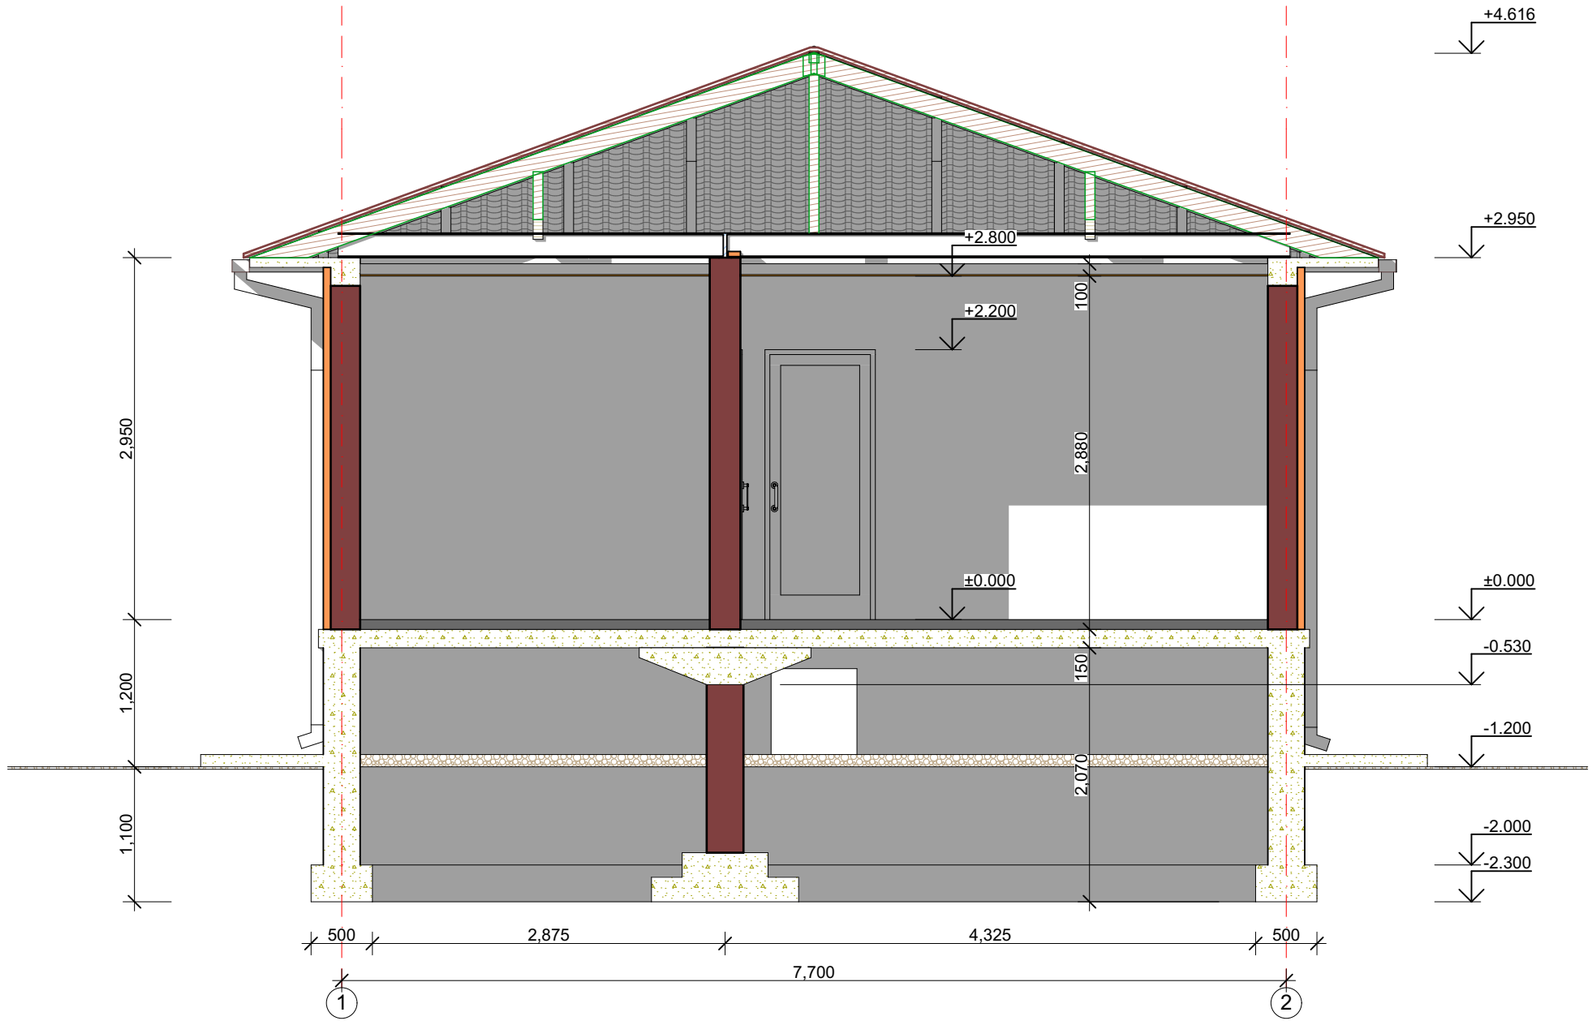

DANISH REFUGEE COUNCIL

Danish Refugee Council

Individual Residential House

(8X8m)

Project address:

Georgia,
Marneuli


-

Stage:
Architectural project


Section 2-2

Format	A - 3
Page	Pages
7	13


Facade 1-2

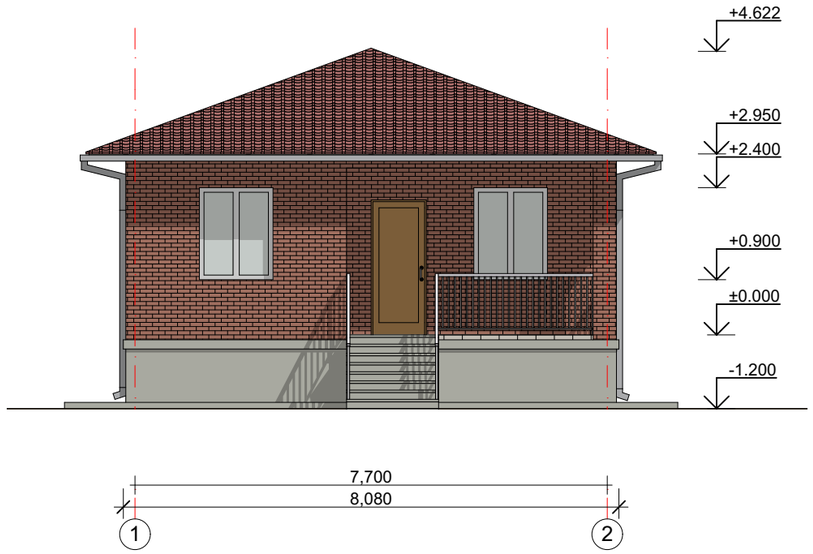


Facade B-A

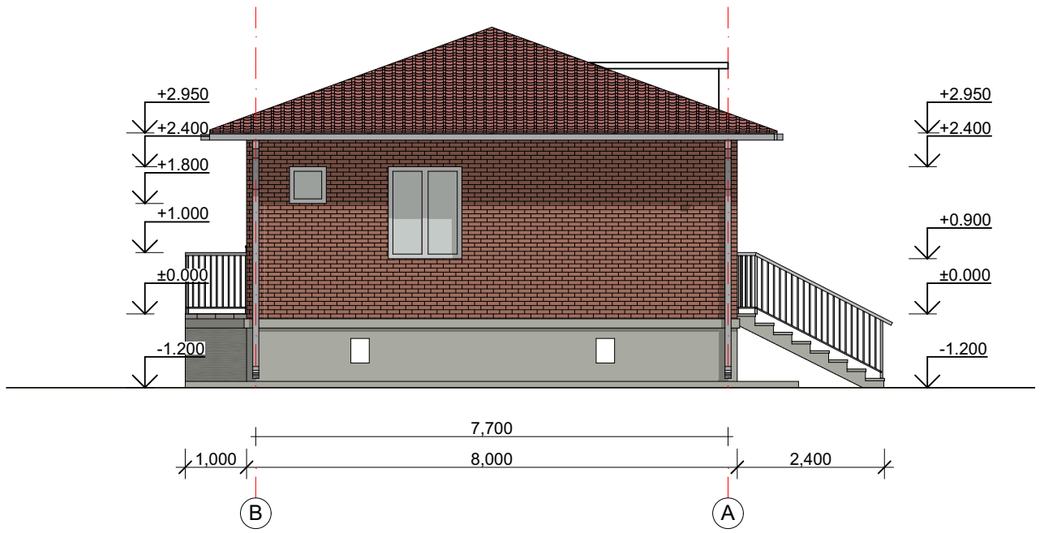

Facade 2-1

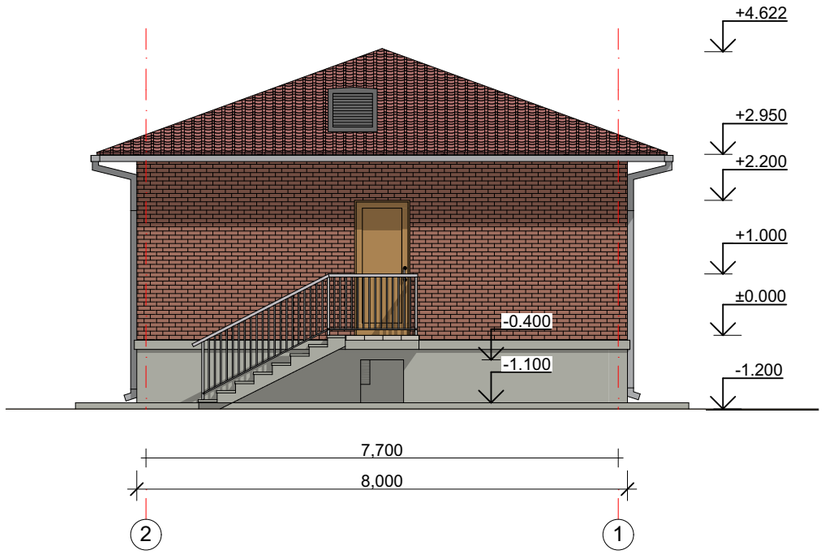

Facade A-B

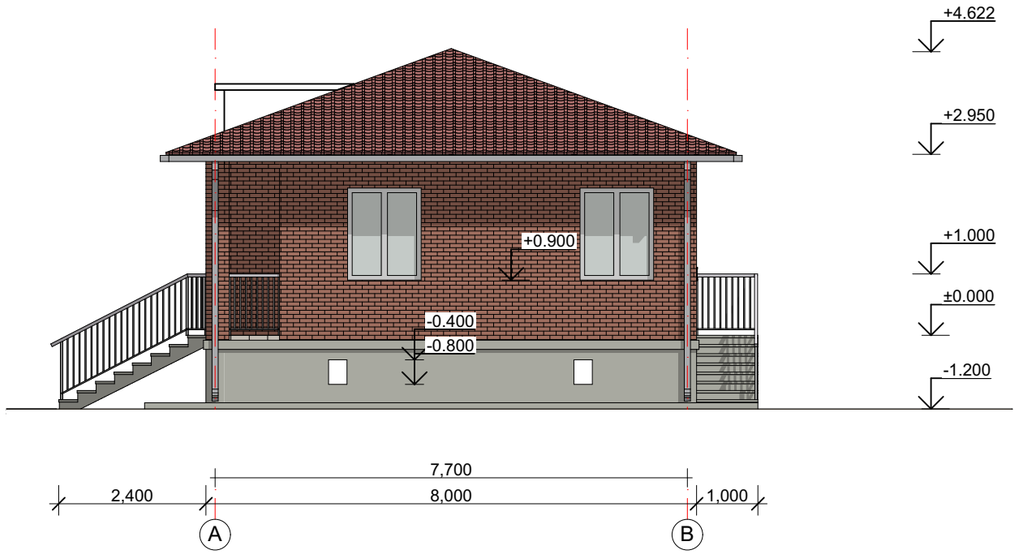

DANISH REFUGEE COUNCIL

Danish Refugee Council

Individual Residential House

(8X8m)

Project address:


Georgia,
Marneuli

Stage:
Architectural project

Facads

Format	A - 3
Page	Pages
8	13

Basement Plan

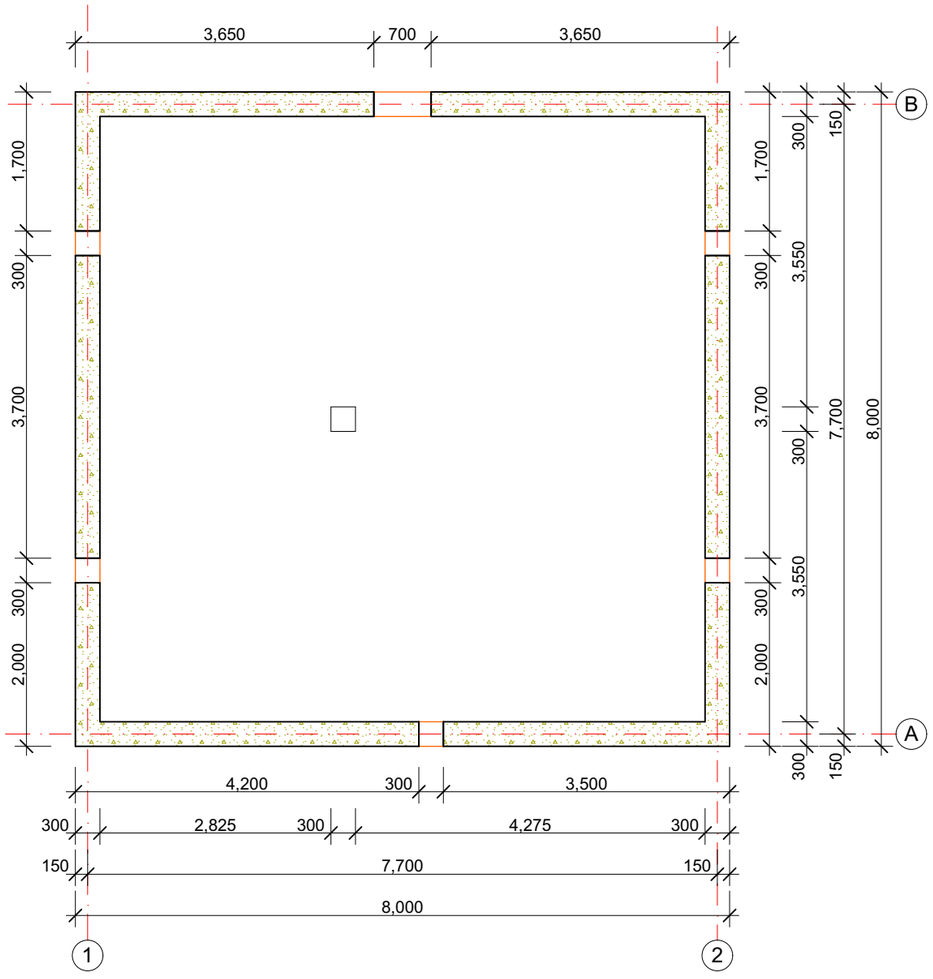

DANISH REFUGEE COUNCIL

Danish Refugee Council

Individual house
(8X8m)

Project address:

Georgia,
Marneuli


Stage:
Architectural project

Basement plan


Format A - 3

Page	ფურცლები Pages
9	13

Floor types

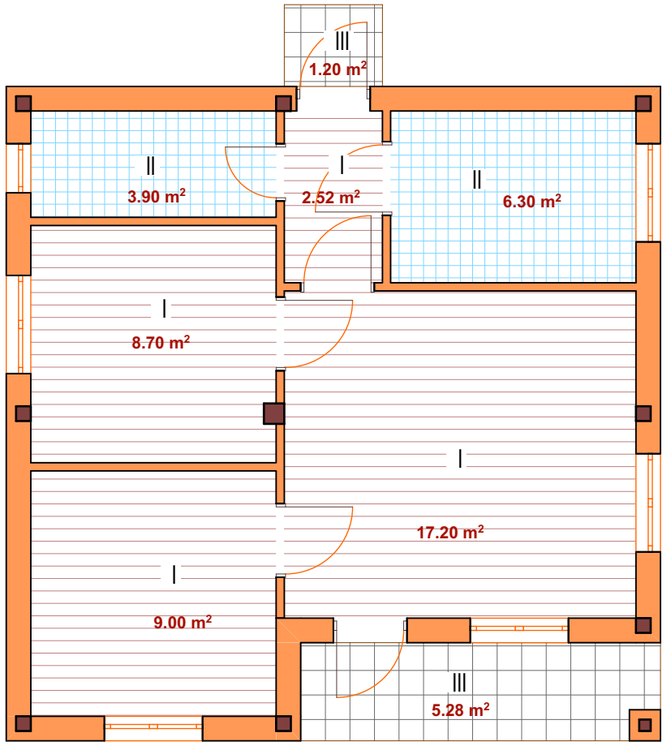


Ceiling Structure

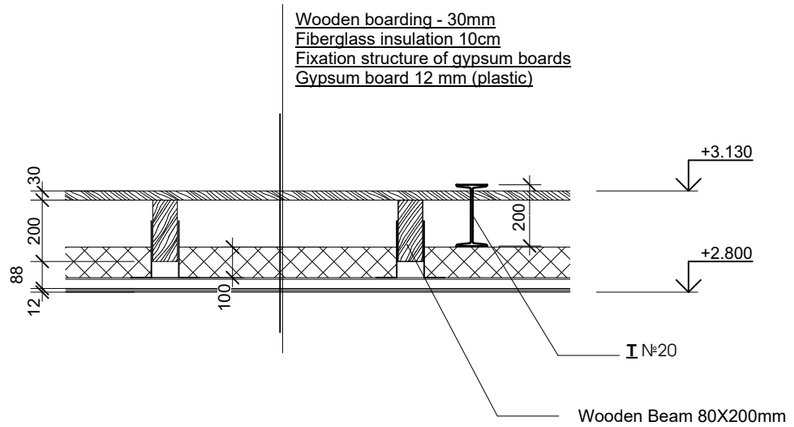


I

Laminated flooring 10 mm
Underlining for laminate
Reinforced levelling of sand and cement 40 mm
XPS tile 30mm
Floor slabs




II

Ceramic tiles 8mm
Sand-cement base 4 cm
XPS tile 3 cm
Two layers of Lincrome
Floor slabs



III

Ceramic tiles 8 mm
Cemend-sand base 4 cm
Floor slabs



Danish Refugee Council

ინდივიდუალური საცხოვრებელი სახლი (8X8მ)

Individual house (8X8m)

Project address:

Georgia,
Marneuli

Stage:
Architectural project

Floor types


Format A - 3

Page	Pages
10	13


Doors and windows

PVC windows

W-1

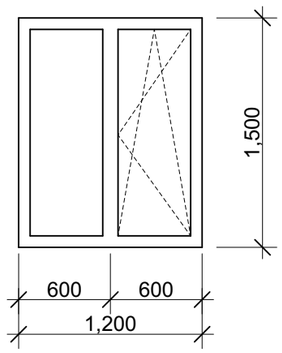


W-2




Steel door

D-1

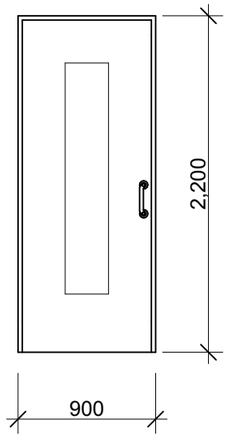


Wooden door (MDF)

D-2

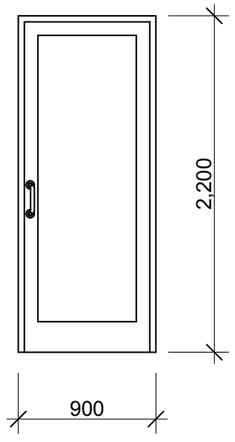

PVC door


D-3

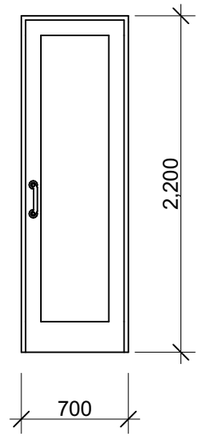


Specification

Mark	Quantity	mm	mm	m2	∑ м2
D-1	2	900	2200	1.98	3.96
D-2	4	900	2200	1.98	7.92
D-3	1	700	2200	1.54	1.54
W-1	5	1200	1500	1.8	9
W-2	1	600	600	0.36	0.36

Apertures in the basement





Danish Refugee Council

Individual Residential House

(8X8m)

Project address:

Georgia,
Marneuli

-


Stage:
Architectural project

Doors and windows


Format A - 3

Page	Pages
11	13

Bathroom and kitchen plan

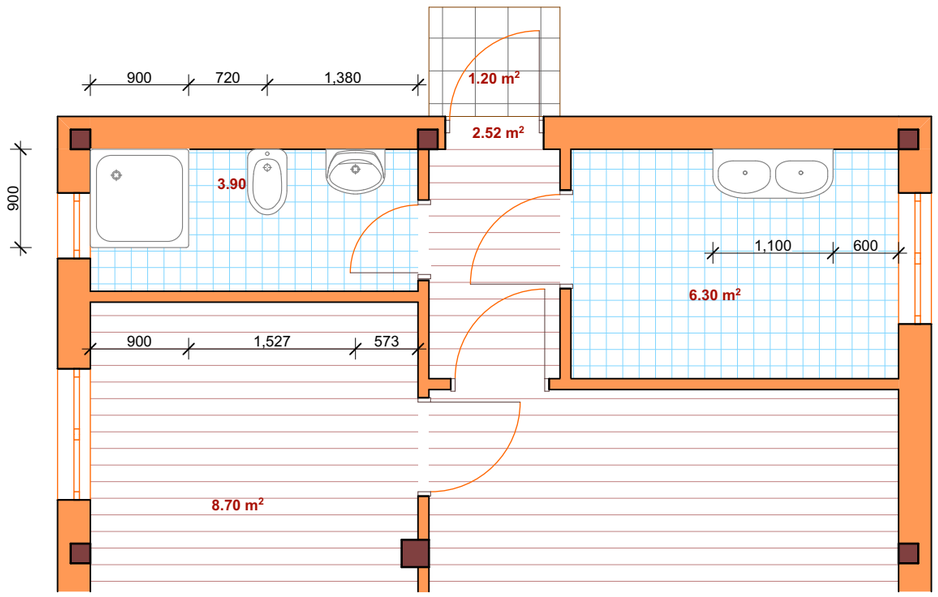

Roof plan

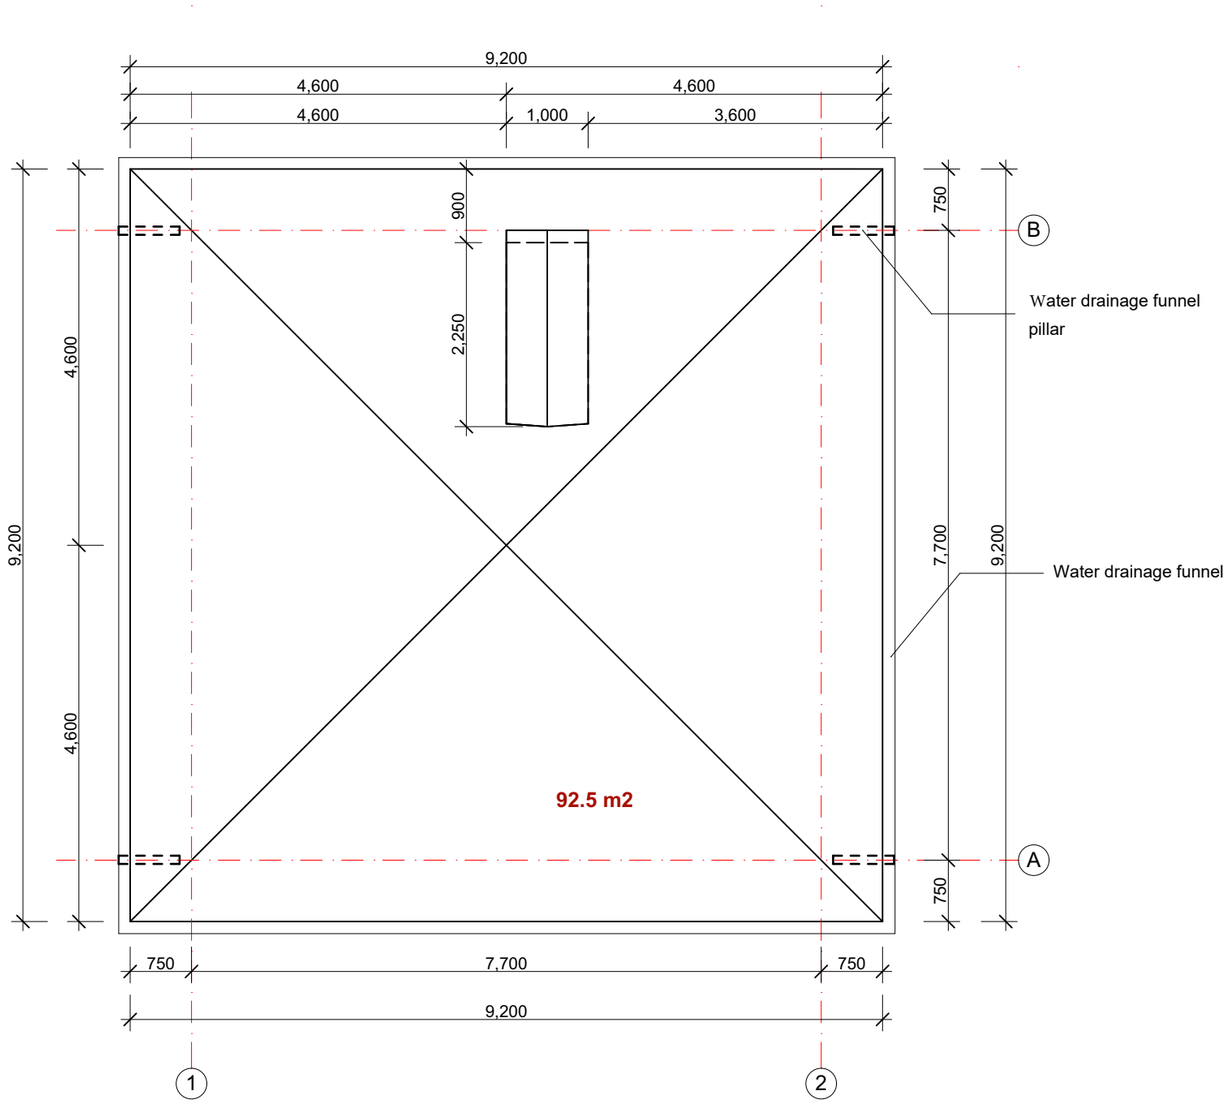

DANISH REFUGEE COUNCIL

Danish Refugee Council

Individual Residential House

(8X8m)

Project address:

Georgia,
Marneuli

-

Stage:
Architectural project

Roof Plan

Bathroom and kitchen plan

Format	A - 3

Page	Pages
12	13

Organization of the Building Site

The plan of organization of the building site is drafted under applicable construction rules and standards of Georgia. The location of the plot of land for the construction site is Iaghluja, Marneuli Municipality.

The building is a one-storey solid structure. The structures of the building are made of the following materials:

- Walls - small wall block masonry, XPS tiles with heat insulation
- Cores - concrete reinforcement
- Belt- concrete reinforcement
- Slab floor - concrete reinforcement
- Roof - sloped roof, metal

While implementing building works it is obligatory to comply with the following fire and safety regulations:

- The building should be fenced from the two adjacent public zones
- Forbidding the entrance of unauthorized personnel to the construction site
- Workers and serving staff should be instructed on fire and safety regulations when implementing building works.
- The working area should be supplied with fire prevention facilities.

Storage of materials should take place considering their technological requirements. Preparation works include the following:

- Cleaning of the building area;
- Fencing of the area:
- Installation of the temporary power supply network;
- Installation of the temporary water supply network;
- The main electricity box should be in a closed condition, it is prohibited to use uncoated wires.

Construction standards should be observed in compliance with 'Construction Directives and Rules' and Technical Regulations on Safety of Buildings and Structures

The construction should be implemented taking into account measures of the environment protection.

მშენებლობის კალენდარული გრაფიკი

Schedule of the Construction Works

№	სამუშაოს აღწერილობა Scope of Work		ნ თვე 6 months																	
			I			II			III			IV			V			VI		
1	საძირკვლის სამუშაოები	Foundation works																		
2	ზაძირკვლის სამუშაოები	Basement works																		
3	გადახურვის რკინაბეტონის ფილის დაბეტონება	Concrete casting of reinforced concrete																		
4	კედლებისა და სვეტების ამოყვანა	Construcion of walls and columns																		
5	შენობის გადახურვა	Roofing of the building																		
6	კედლების შელესვა	Wall Plastering																		
7	მოვირკეთებითი სამუშაოები	Finishing works																		
8	ელსამონტაჟო სამუშაოები	Electrical mounting works																		
9	სან-ტექნიკური სამუშაოები	Sanitary Engineering Works																		
10	ეზოს კეთილმოწყობის სამუშაოები	Arrangement of the yard																		
11	ტერიტორიის დასუფთავება	Cleaning of the area																		

DANISH REFUGEE COUNCIL

Danish Refugee Council

Individual residential House

(8X8m)

Project address:

Georgia,
Marneuli

Stage:
Architectural project

Schedule of the Construction Works

Format A - 3

Page	Pages
13	13